




ATAS International, Inc.
Sustainable Solutions For A Better Future

INSPIRE[®]

Solar Air Heating & Drying

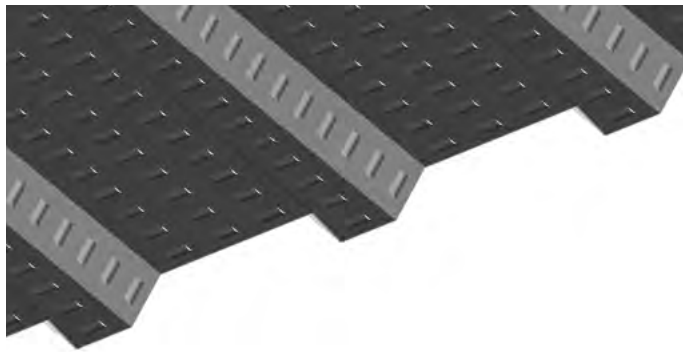

InSpire® BWS390 panel with precision lanced micro perforations

INSPIRE® & INSPIRE® HP

SKU: BWS390, BWS392

MATERIAL

.028" aluminum in Select Finish only &
.032" aluminum in PVDF colors only

PANEL SPECS

Coverage: 39³/₈"
Minimum Length: 6'-0"
Maximum Length: 40'-0"
Depth: 1¹/₄"

TEXTURE

Smooth with precision-lanced micro perforations

FINISH

70% PVDF, Select Blue (InSpire HP)

COLORS

To view our selection of solar efficient colors and absorptivity rates, visit www.atas.com/inspirewall



ACCESSORIES

A complete line of trims available in matching colors, gauges, and finishes or as specified

FASTENERS

Exposed (standard)
Concealed (upon request)

*Subject to minimum quantities and extended lead time.
Inquire for material and panel coverage availability.

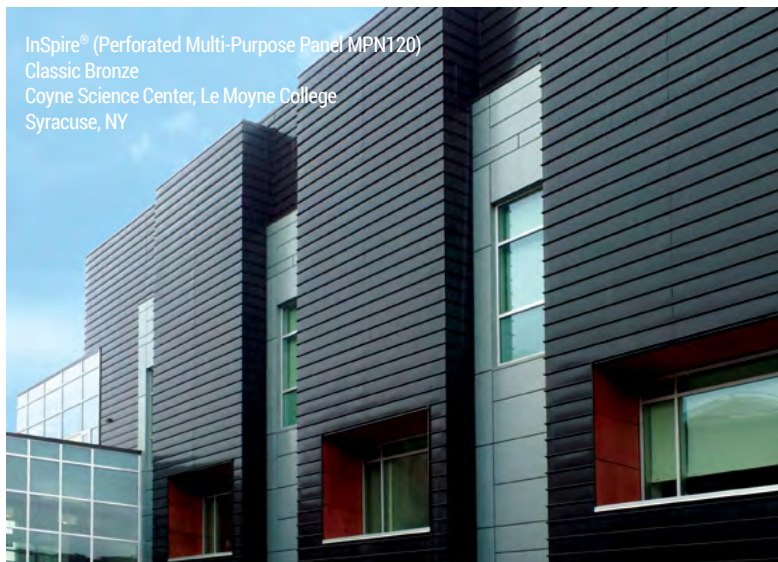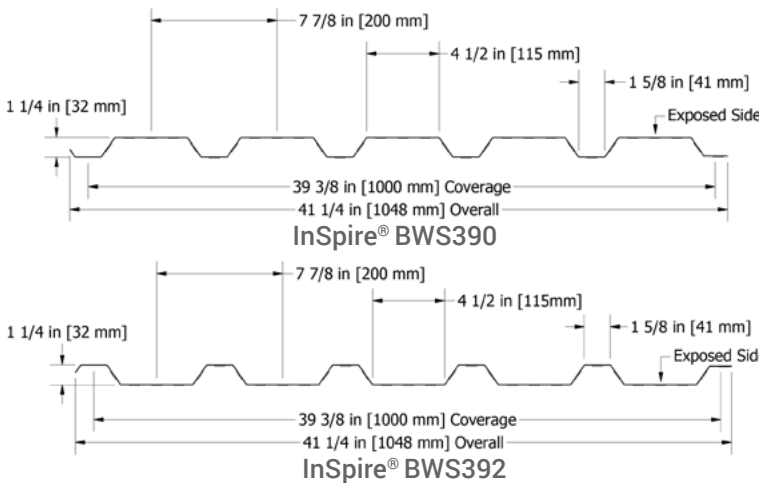

Transform any ATAS wall panel profile into a high performance InSpire® cladding element with our precision engineered round perforations.

visit www.atas.com/products/metal-wall-panels

FEATURES:

SUSTAINABILITY

- Heats fresh air
- Lowers heating costs by \$1.50 to \$5.50 per sq. ft. of panel per year
- Utilizes free solar energy
- Converts up to 80% of solar energy
- Recaptures heat loss through building wall
- Beneficial in summer
- Contributes toward potential LEED® credits
- Favorable tax incentives
- ATAS is the leading US-based manufacturer of transpired collectors

FEATURES

- .028" aluminum: in Select Finish only
- .032" aluminum: in PVDF colors only
- Color variety
- 70% PVDF finish, Select Blue
- Contributes to a building's health and wellness by improving indoor air quality


TESTING & CERTIFICATIONS

- SRCC OG-100
 - Solar Rating and Certification Corporation
 - Solar collector thermal performance testing, analysis, and certification Standard 100
- Highest Heat Gain
 - Third party independent testing verified highest heat gain in the industry
- Highest Performance Factor per RETScreen® Energy Modeling & Performance Analysis
- Solar Keymark Certification

InSpire HP is offered in a Select Blue finish. What is a select surface? It's an optical coating applied to the surface of an element of a solar energy device to reduce thermal radiation losses through low emissivity of finish. This increases yearly output by more than 30% over any traditional paint finish. Use InSpire HP to enhance absorptivity and efficiency to an already solid foundation of the solar collector. Learn more at www.inspirewall.com.

HOW INSPIRE WORKS


STAND ALONE SYSTEM

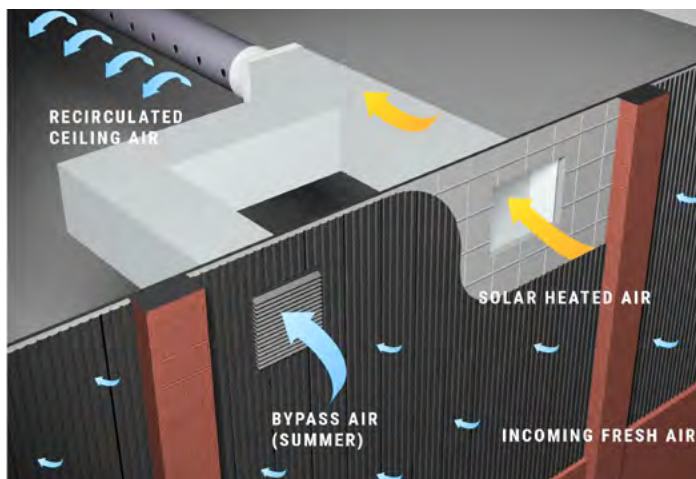

- Collector is linked to a stand-alone fan with modulating dampers to maintain constant air supply temperature and air flow
- Often found in industrial buildings and warehouses

An intake fan creates a pressure drop inside the plenum, pulling the warmed air through the perforated panel and into the fan. From there the warm air travels through a perforated sock or duct, distributing the air throughout the building.

MAKE-UP AIR PREHEATING SYSTEM

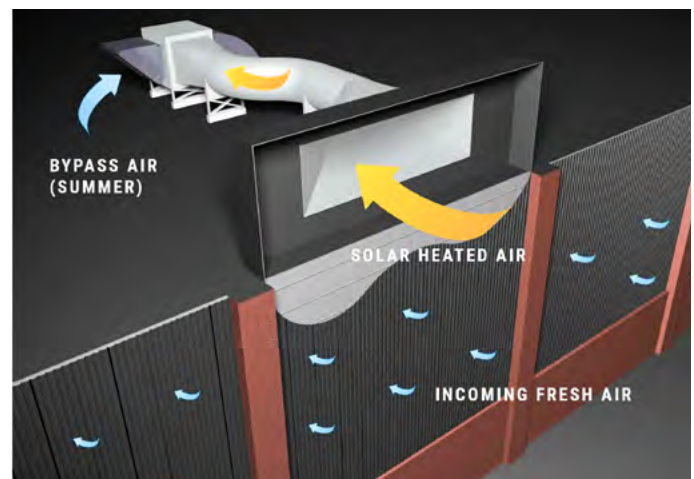

- Collector is located upstream of air handling unit to directly preheat incoming outside air
- Often found in schools and industrial buildings
- Perfect for spray paint booths, driers, 100% outside air systems, clean rooms, etc.

If a building requires outside make up air and it's located in a climate that has a heating season, this system aids in lowering a portion of the energy that normally would go towards heating the outside make-up air. This system does not replace the primary heat source but acts as a supplement, reducing the workload of the normal heating system.

 For more information: Visit www.atas.com/inspirewall

INSPIRE® COLOR CHART

Solar Efficient Colors | Solar Absorptivity



Black (.95)



Char Brown* (.76)



Matte Black* (.91)



Classic Bronze (.88)



Chocolate Brown (.74)



Thunder Grey* (.74)



Redwood (.76)



Hartford Green (.75)



Antique Patina (.74)




Charcoal Grey (.71)



Rocky Grey (.71)




Regal Blue (.73)



Boysenberry (.72)



Forest Green (.72)



Medium Bronze (.67)



Siam Blue (.66)




Teal (.70)



Hemlock Green (.70)



Slate Blue (.69)



Slate Grey (.60)



Mission Red (.59)



Brite Red (.59)




Anchor Grey* (.61)



Select Blue* (.94)

*Denotes colors in a matte finish | The colors above are representative and may vary slightly from actual colors. Prior to making final selections, please request actual color chip samples. All information is subject to change without notice.

*Denotes InSpire® HP select surface colors

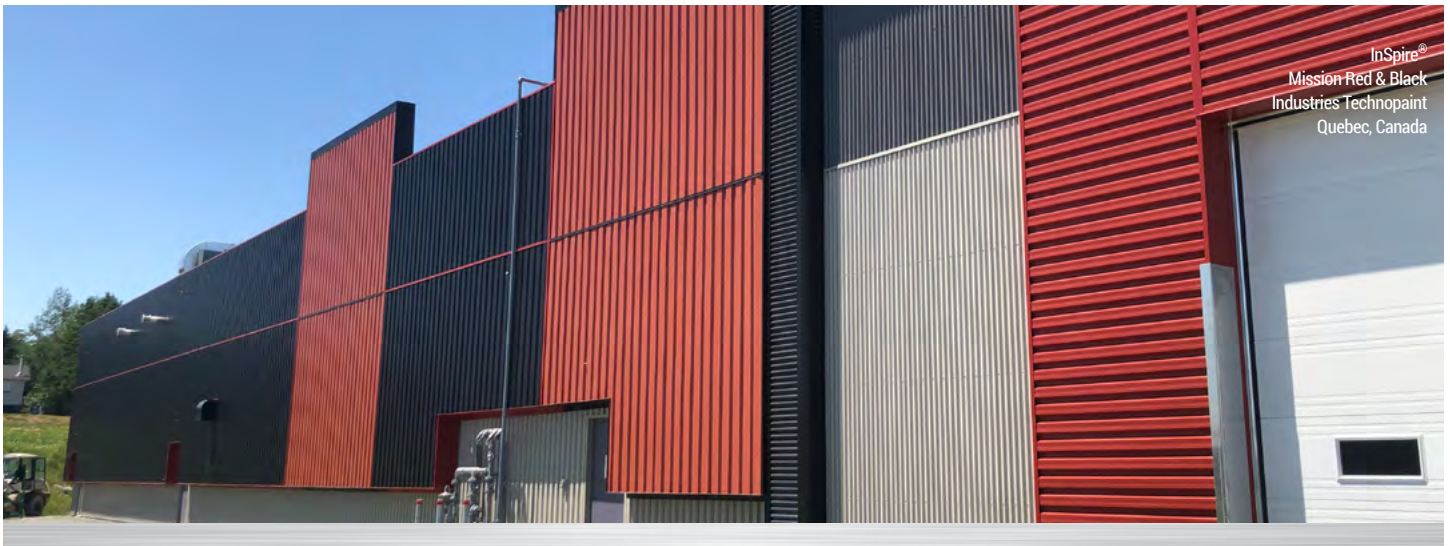

InSpire®
Mission Red & Black
Industries Technopaint
Quebec, Canada

ATAS International, Inc.

Allentown, PA | Mesa, AZ | University Park, IL | Elkton, MD

www.inspirewall.com | www.atas.com | 800.468.1441



InSpire® is a registered trademark of ATAS International, Inc. ATAS' technical staff is able to assist in the design or provide shop drawings for your project. Final choice of materials and installation is the responsibility of the owner, architect and/or the owner's agent. ATAS International, Inc. cannot be held responsible for the ultimate selection or the installation of those materials. Due to slight stress in metal materials and substrates to which metal panels are applied, installed panels may exhibit a perceived waviness in the flat areas of the panel. Commonly the period and amplitude of the waviness is dependent upon the continuous flat width of the panel. This condition is beyond the control of ATAS and consequently this perceived waviness or "oil canning" of the product is not a valid reason for rejection of materials. (Refer to ASTM E 1514, ASTM E 1637 and Metal Construction Association Technical Bulletin 1060 for further clarification). ATAS reserves the right to modify, eliminate and/or change its products without prior notification. ATAS cannot be held responsible for errors in line drawings and typesetting. Inquire for availability. Colors are as close to the actual colors as modern printing allows. Exact color chips on request; this is a requirement for all premium colors. If you have requirements or preference for colors or finishes other than shown, contact ATAS. Color availability varies by material, gauge and profile. ATAS is not responsible for colors selected from this chart. Contact ATAS for more information. © 2026 ATAS International, Inc. LRD0526 LAT111