
ATAS International, Inc. Sustainable Solutions For A Better Future

RAPID-LOK COPING

SPECIFICATION SHEET

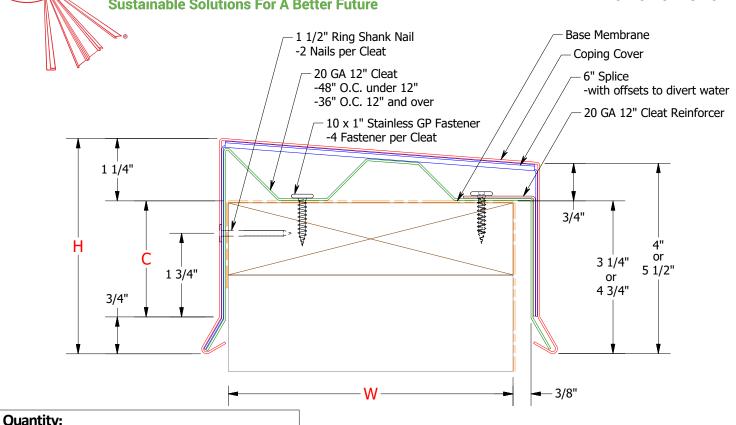

| Qualitity. | | | | |
|---|-------------------|--|--|--|
| Total LF (12'-0" pcs) | | | | |
| Radius Coping LF (6'-0" pcs) | | | | |
| (Radius:, Convex or Concave) | | | | |
| Vaulted Coping LF (6'-0" pcs) | | | | |
| (Radius:, Convex or Concave) | | | | |
| Standard Accessories: | | | | |
| Inside Mitered Corner(s) (Angle:) | | | | |
| Outside Mitered Corner(s) (Angle:) | | | | |
| End Closure(s) (Left, Right) | | | | |
| End Term(s) (L | eft, Right) | | | |
| Custom Accessories: (sketches required) | | | | |
| -Inline Transition(s) | | | | |
| -Transition Miter(s) | -Zee(s) | | | |
| -Ridge Miter(s) | -Special Miter(s) | | | |
| -Valley Miter(s) | | | | |
| *All Componets for installing Accessories are included. | | | | |
| MATERIAL: | THICKNESS: | | | |
| | □.040 □.050 □.063 | | | |
| | | | | |
| ☐ Mill Finished Aluminum | □.040 □.050 □.063 | | | |

□ Pre-Finished Steel□ Stainless Steel

COLOR:

☐ 24 ga ☐ 22 ga

☐ 24 ga ☐ 22 ga

psf

_psf

ANSI/SPRI ES-1 Tested

Projects Requirement's Horizontal Design Pressure:_

Vertical Design Pressure:_

| - | C DIMENSION | H DIMENSION | W DIMENSION | |
|-----------------------|-----------------|-------------|-------------|--|
| - | 2-1/2" | 4-1/2" | 4"-12" | |
| - | 4" | 6" | 4"-12" | |
| - | 5-1/2" | 7-1/2" | 4"-12" | |
| - | 2-1/2" | 4-1/2" | 12"-32" | |
| - | 4" | 6" | 12"-32" | |
| - | 5-1/2" | 7-1/2" | 12"-32" | |
| Job Name: Customer: | | | | |
| Job #: | Representative: | | | |
| Location: | Distributor: | | | |
| CUSTOMER APPROVAL | | | | |
| Authorized Signature: | | | | |
| Approved by: | | | | |
| Date: | | | | |