
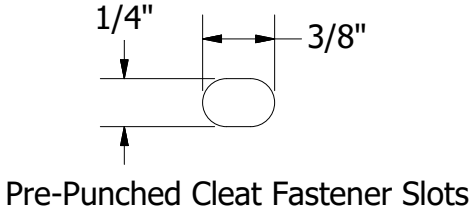
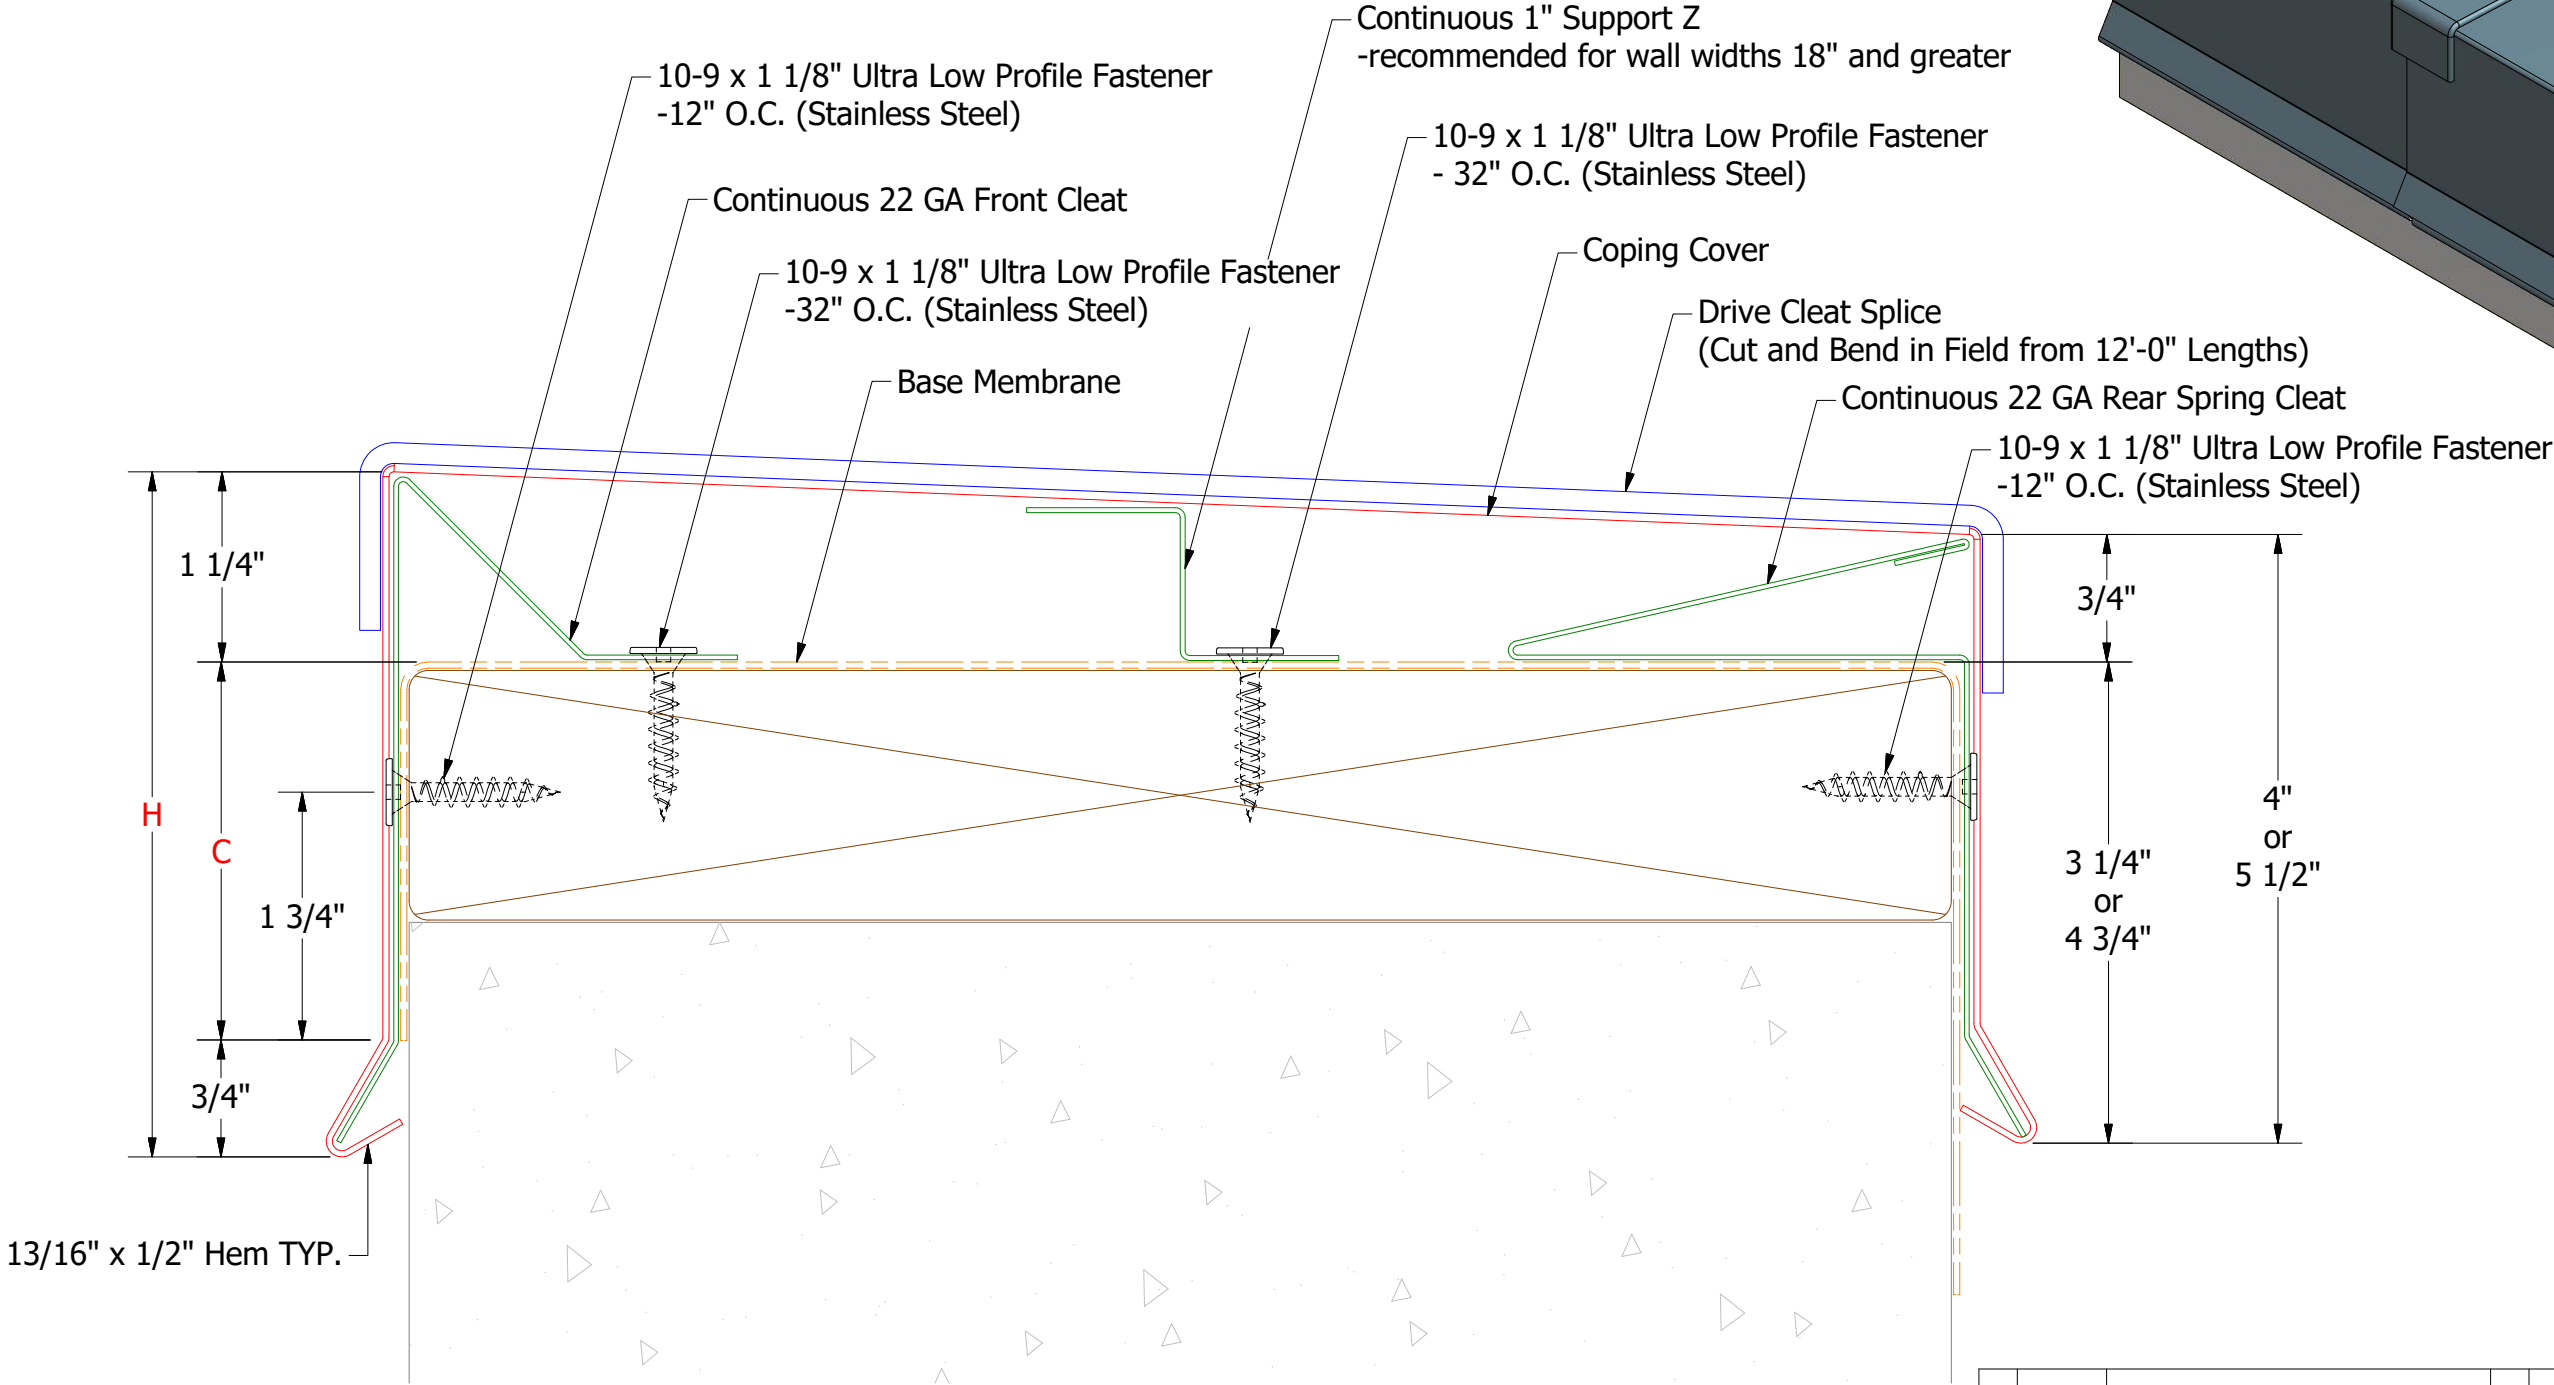


BOM per 12'-0"		
Componet	QTY (5 1/2"-18")	QTY (18"-32")
22 GA Front Cleat	1	1
22 GA Rear Spring Cleat	1	1
Drive Cleat Splice	1	1
10-9 x 1 1/8" ULP Fastener	29	34
1" Support Z	x	1


Dimensions		
Coverage (C)	Height (H)	Width (W)
2 1/2"	4 1/2"	5 1/2" - 32"
4"	6"	5 1/2" - 32"
5 1/2"	7 1/2"	5 1/2" - 32"

Standard Materials	
Materials	Available Gauges
Pre-Finished Steel	24 GA, 22 GA
Stainless Steel	24 GA, 22 GA
Pre-Finished Alum.	.040, .050, .063
Mill Alum.	.040, .050, .063

BOM per 11'-10"		
Componet	QTY (5 1/2"-18")	QTY (18"-32")
Coping Cover	1	1

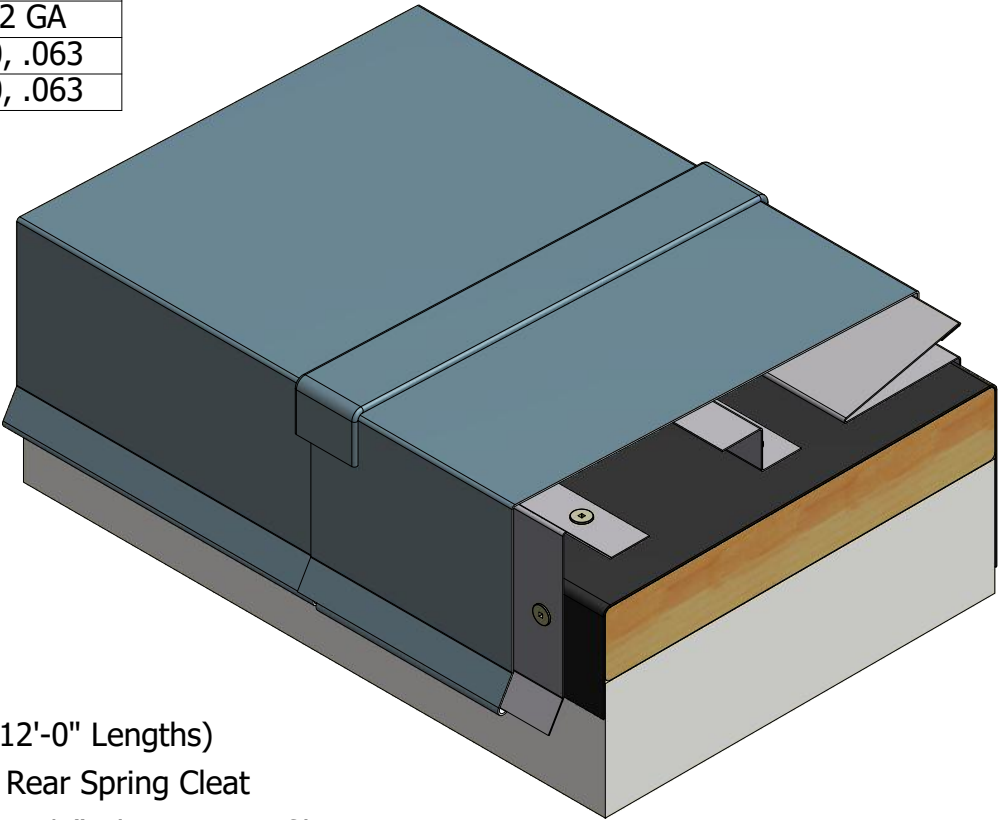

Tested per ANSI/SPRI ES-1

		ATAS INTERNATIONAL, INC Allentown PA 610-395-8445 Mesa AZ 480-558-7210	
TITLE Rapid-Lok SL Coping Product Detail - Drive Cleat			
DWG. NO.		DR KRK	DATE 7/23/2024
MATERIAL		APP	DATE
		SH. SIZE B	SCALE X:X