

## 1 1/2" FIELD-LOK™

SKU: FLM125, FLM165, FLM207, FLM999

### MATERIAL

.032, .040 aluminum  
 24, 22\* ga. metallic coated steel  
 24 ga. 55% Al-Zn alloy coated steel with acrylic coating  
 16, 20 oz. copper\*<sup>^</sup>  
 .8 mm zinc\*<sup>^</sup>  
 .0197 classic & tin matte stainless steel\*<sup>^</sup>  
<sup>^</sup>Inquire for available panel widths

### PANEL SPECS

Coverage: 12 1/2", 16 1/2", 20 3/4"  
 Custom widths available\* (Plank ribs standard, specify without ribs or striations)  
 Minimum Length: 4'-0"  
 Seam Height: 1 1/2"

### AVAILABLE

Tapered, Stretch Curved (Convex)  
 Factory panel pre-notching available.  
 Contact ATAS for specifics.



### TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 aluminum)

### MINIMUM SLOPE

2:12 depending on climate conditions

[www.atas.com/flm](http://www.atas.com/flm)

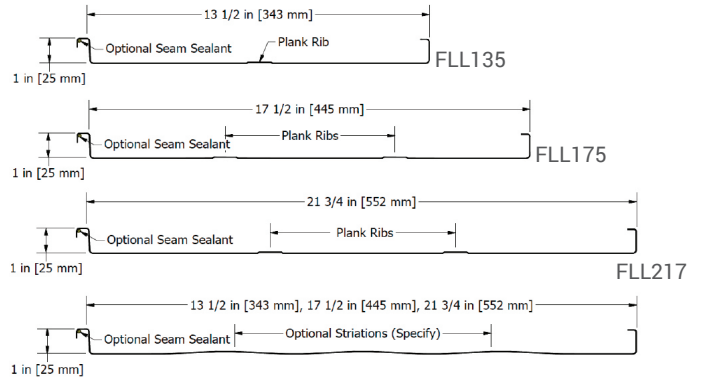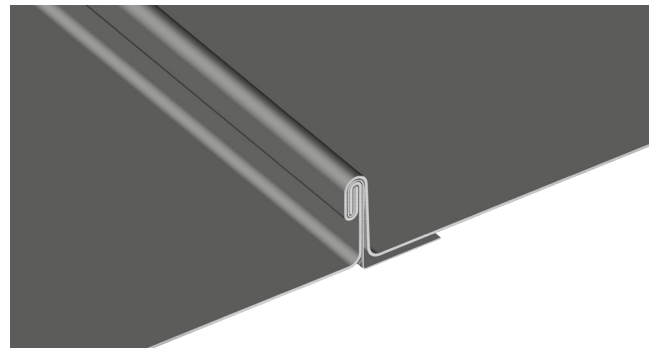

## 1" FIELD-LOK™

SKU: FLL135, FLL175, FLL217, FLL999

### MATERIAL

.032, .040 aluminum  
 24, 22\* ga. metallic coated steel  
 24 ga. 55% Al-Zn alloy coated steel with acrylic coating  
 16, 20 oz. copper\*<sup>^</sup>  
 .8 mm zinc\*<sup>^</sup>  
 .0197 classic & tin matte stainless steel\*<sup>^</sup>  
<sup>^</sup>Inquire for available panel widths

### PANEL SPECS

Coverage: 13 1/2", 17 1/2", 21 3/4"  
 Custom widths available\* (Plank ribs standard, specify without ribs or striations)  
 Minimum Length: 4'-0"  
 Seam Height: 1"

### AVAILABLE

Tapered, Stretch Curved (Convex)  
 Factory panel pre-notching available.  
 Contact ATAS for specifics.

### TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 aluminum)

### MINIMUM SLOPE

2:12 depending on climate conditions

[www.atas.com/fll](http://www.atas.com/fll)