




Stiffening Ribs



Without Ribs



Striations

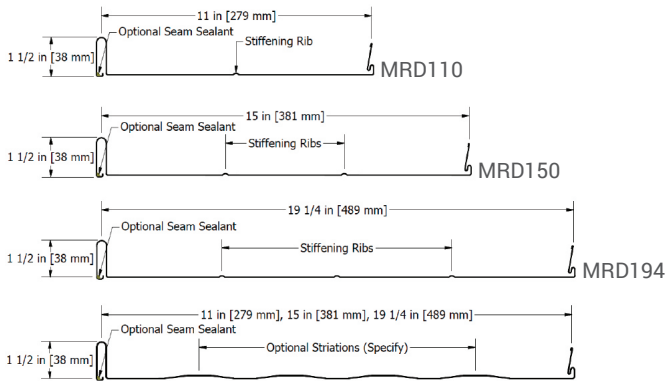

## DUTCH SEAM®

SKU: MRD110, MRD150, MRD194

### MATERIAL

- .032, .040 aluminum
- 24, 22\* ga. metallic coated steel
- 24 ga. 55% Al-Zn alloy coated steel with acrylic coating
- 16, 20 oz. copper\*
- .8 mm zinc\* (MRD110 only)



### PANEL SPECS

- Coverage: 11", 15", 19 1/4"
- (stiffening ribs standard, specify without ribs or with striations)
- Minimum Length: 2'-0"
- Seam Height: 1 1/2"

### TEXTURE

Smooth or Stucco Embossed

[www.atas.com/dutchseamwalls](http://www.atas.com/dutchseamwalls)

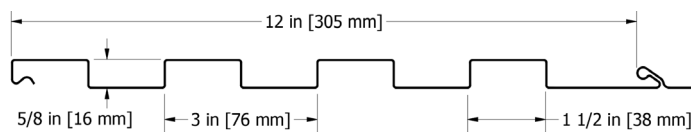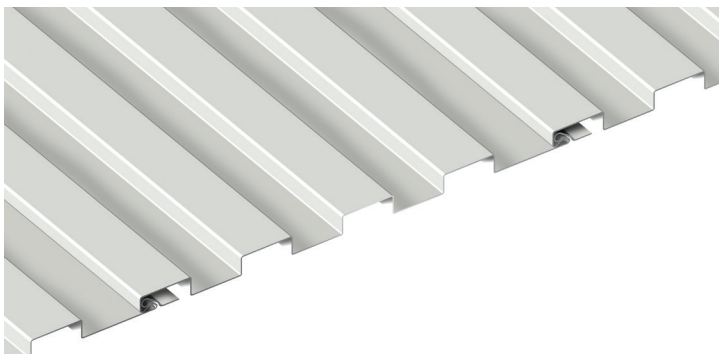

## METAFOR™

SKU: MFP120

### MATERIAL

- .032, .040, .050 aluminum
- 16, 20 oz. copper\*
- .8, 1.0 mm zinc\*
- .0197 classic & tin matte stainless steel\*

### PANEL SPECS

- Coverage: 12"
- Minimum Length: 3'-0"
- Depth: 5/8"

### AVAILABLE

Stretch Curving

### TEXTURE

Smooth or Stucco Embossed

[www.atas.com/metafor](http://www.atas.com/metafor)